


**Dimensions**



**Specification**

Pixel Pitch	2.9mm
Pixel Density	112,896 pixels/m <sup>2</sup>
LED Arrangement	SMD 2121
Module Resolution	84x84 pixels
Module Dimension	250x250mm
Panel Resolution	168x168 pixels
Panel Dimension	500 x 500 x 71mm (19.69 x 19.69 x 2.8 in)
Panel Weight	8.2kg
Brightness Level	800-1,000 nits
Max. Power Consumption	<400 W/m <sup>2</sup>
Ave. Power Consumption	<135 W/m <sup>2</sup>
Visual Viewing Angle	H: 160°/ V: 140°
Operating Power Source	100-240 AC 50-60 Hz
Operating Temperature	-20 ~ +45
Refresh Rate	3,840 Hz
Protection Rating	IP20
Signal Input Source	S-Video, VGA, DVI, HDMI, SDI

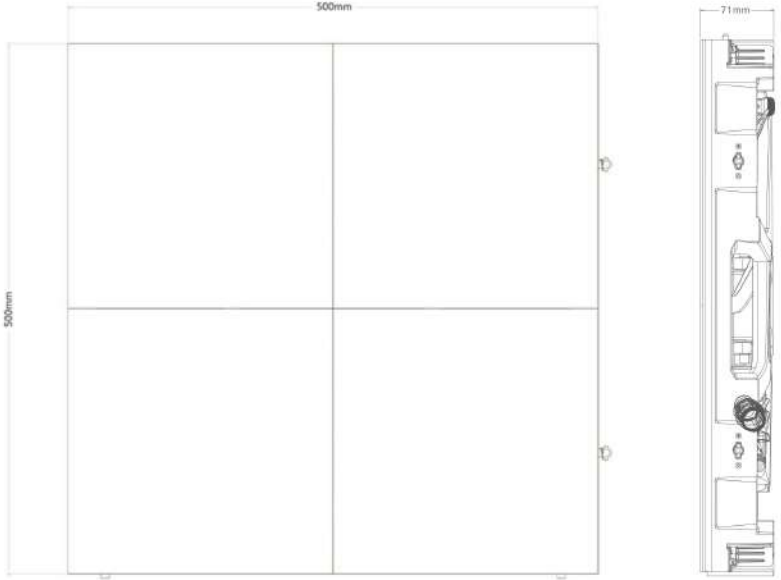

Shivam Video Pvt. Ltd  
 sales@shivamvideo.com, marketing@shivamvideo.com  
 www.shivamvideo.in

## Hybrid Series



### Perfect corner solution

Can be customized




### Hybrid Series

Electronic DATA & Technical Specification

2.9mm Pitch	Black SMD LED type	160/140 Viewing Angle
3,840Hz Refresh Rate	800-1,000Nits Brightness	14Bits Grayscale
Die-casting Aluminum Panel Material	Concave & Convex Lock system	Front and Rear Service type

### Excellent video performance

- > Full Black SMD LEDs, High Contrast Ratio
- > High Refresh Rate, No Flickering
- > Calibration Memory in LED Module
- > No AB Module(No Left & Right Direction Installation)
- > Superb Visual Quality, No Gap Alignment
- > Superb Surface Flatness
- > Magnetic Front Service (Screw Optional)
- > Strengthen Housing Structure Design, No Deformation

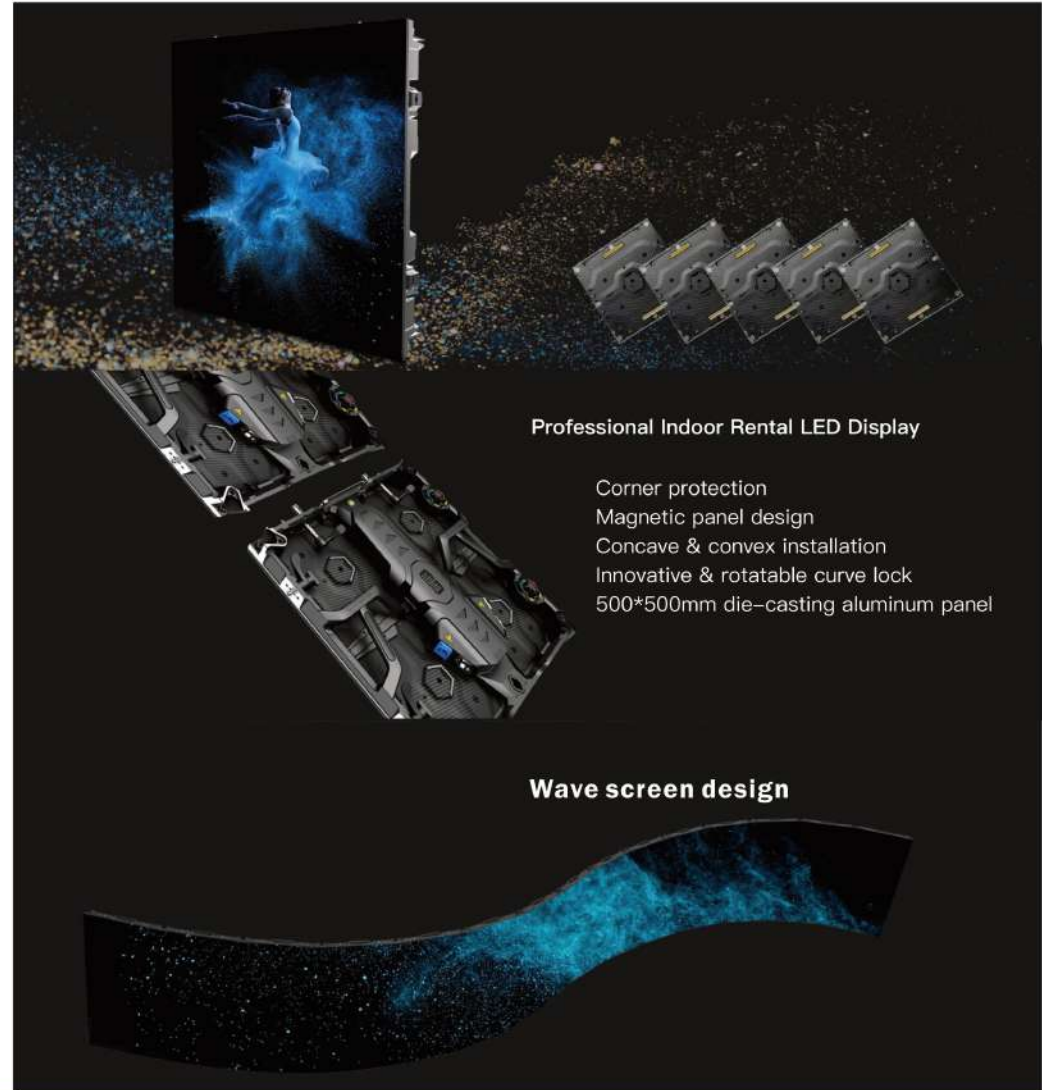

### Professional Indoor Rental LED Display

- Corner protection
- Magnetic panel design
- Concave & convex installation
- Innovative & rotatable curve lock
- 500\*500mm die-casting aluminum panel

### Wave screen design



Hybrid Series

Hybrid Series

